

Hose sleeve

ST G3/4-AG 25 MS-V

Part no.: 10.08.03.00166

<https://www.schmalz.co.jp/10.08.03.00166>

Home > Vacuum Technology for Automation > Vacuum Components > Filters and Connections > Hoses and Connections > Accessories for Screw Unions > ST G3/4-AG 25 MS-V

Hose sleeve



Thread G1: G3/4"-M

Hose diameter (rec.) d: 25 mm


Material: Brass

Surface: nickel plated

Length L: 8.5 mm

Nominal diameter dn: 18.5 mm

Design Data

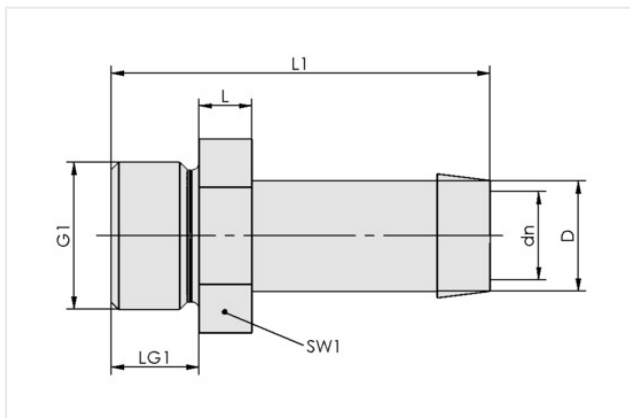

Attribute	Value
dn	18.50 mm
D	25 mm
G1	G3/4"-M
L	8.50 mm
L1	60 mm
LG1	16 mm
SW1	32 mm

Technical Data

Attribute	Value
Material	Brass
Weight	146.90 g

Accessories

Contact Schmalz


Schmalz K.K. | 3001-7 Odana-cho, Tsuzuki-ku, 224-0027 Yokohama, Japan | +81 45 565 5150 | schmalz@schmalz.co.jp

Hose sleeve

ST G3/4-AG 25 MS-V

Part no.: 10.08.03.00166

<https://www.schmalz.co.jp/10.08.03.00166>

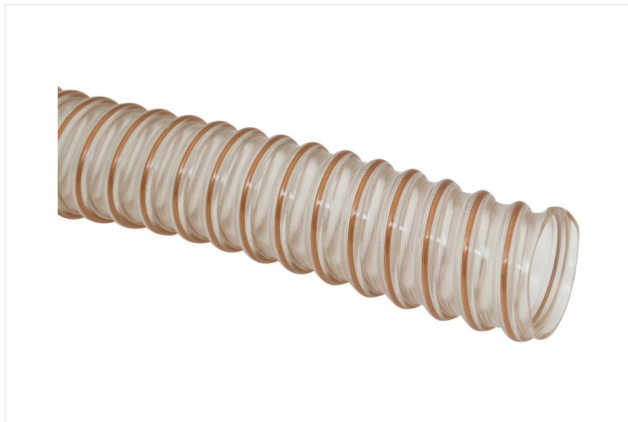

VSL 32-25 PU-DS-AS TR

Part no.: 10.07.09.00051

External diameter D: 32 mm

Internal diameter d: 25 mm

Length max.: 20 m

Material hose: PU, wire spiral, antistatic

Bending radius min.: 20 mm

Pressure range (operating pressure): -1.00 ... 3.86 bar

Operating temperature: -40 ... 90 ° C



VSL 33-25 PVC-DS KL-TR

Part no.: 10.07.09.00041

External diameter D: 33 mm

Internal diameter d: 25 mm

Length max.: 50 m

Material hose: PVC with wire spiral

Bending radius min.: 95 mm

Pressure range (operating pressure): -0.85 ... 4.00 bar

Operating temperature: -15 ... 65 ° C

Contact Schmalz

Schmalz K.K. | 3001-7 Odana-cho, Tsuzuki-ku, 224-0027 Yokohama, Japan | +81 45 565 5150 | schmalz@schmalz.co.jp