

## Plug union, straight

STV-GE G3/8-AG 8

Part no.: 10.08.02.00237

<https://www.schmalz.co.jp/10.08.02.00237>

Home > Screw in Push Fittings > STV-GE G3/8-AG 8

### Push-in Fitting, straight



Thread G1: G3/8"-M

Hose diameter: 8 mm


Material: Brass

Operating temperature: -20 ... 80 ° C

External diameter D: 14.6 mm

Length L: 17.4 mm

### Design Data

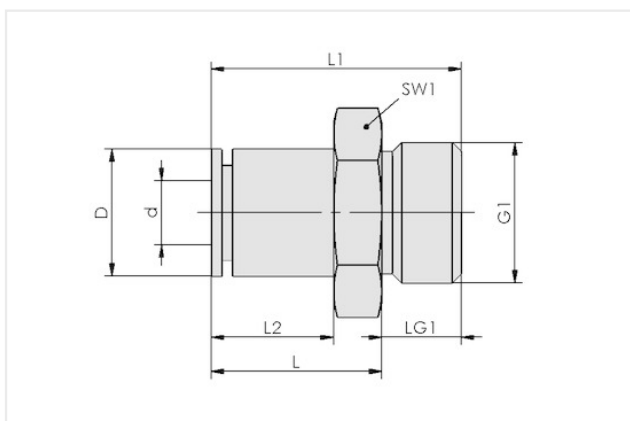

| Attribute | Value    |
|-----------|----------|
| D         | 14.60 mm |
| d         | 8 mm     |
| G1        | G3/8"-M  |
| dn        | 6 mm     |
| L         | 17.40 mm |
| L1        | 25 mm    |
| L2        | 11.80 mm |
| LG1       | 7.60 mm  |
| SW1       | 20 mm    |

### Technical Data

| Attribute                           | Value               |
|-------------------------------------|---------------------|
| Hose type                           | Hose D = 8 d = 6    |
| Hose type                           | 8-6                 |
| Material                            | Brass               |
| Pressure range (operating pressure) | -0.95 ... 15.00 bar |
| Operating temperature               | -20 ... 80 ° C      |
| Weight                              | 25 g                |
| Product family                      | STV                 |

### Contact Schmalz

Schmalz K.K. | 3001-7 Odana-cho, Tsuzuki-ku, 224-0027 Yokohama, Japan | +81 45 565 5150 | [schmalz@schmalz.co.jp](mailto:schmalz@schmalz.co.jp)

## Plug union, straight

STV-GE G3/8-AG 8

Part no.: 10.08.02.00237

<https://www.schmalz.co.jp/10.08.02.00237>

### Accessories



#### VSL 8-6 PE BL

Part no.: 10.07.09.00015

External diameter D: 8 mm

Internal diameter d: 6 mm

Length max.: 100 m

Material hose: PE

Pressure range (operating pressure): bar

Operating temperature: ° C



#### VSL 8-6 PU MI-TR

Part no.: 10.07.09.00003

External diameter D: 8 mm

Internal diameter d: 6 mm

Length max.: 500 m

Material hose: PU

Bending radius min.: 45 mm

Pressure range (operating pressure): -0.95 ... 10.00 bar

Operating temperature: -35 ... 60 ° C

### Contact Schmalz

Schmalz K.K. | 3001-7 Odana-cho, Tsuzuki-ku, 224-0027 Yokohama, Japan | +81 45 565 5150 | [schmalz@schmalz.co.jp](mailto:schmalz@schmalz.co.jp)