

Vacuum hose (meter)

VSL 71-60 PU-DS-AS TR

Part no.: 10.07.09.00034

<https://www.schmalz.co.jp/10.07.09.00034>

Home > Vacuum Technology for Automation > Vacuum Components > Filters and Connections > Hoses and Connections > Vacuum / Compressed Air Hoses VSL > VSL 71-60 PU-DS-AS TR

Hose for vacuum and compressed-air systems



External diameter D: 71 mm

Internal diameter d: 60 mm

Length max.: 20 m


Material hose: PU, wire spiral, antistatic

Bending radius min.: 40 mm

Pressure range (operating pressure): -0.69 ... 2.09 bar

Operating temperature: -40 ... 90 ° C

Design Data

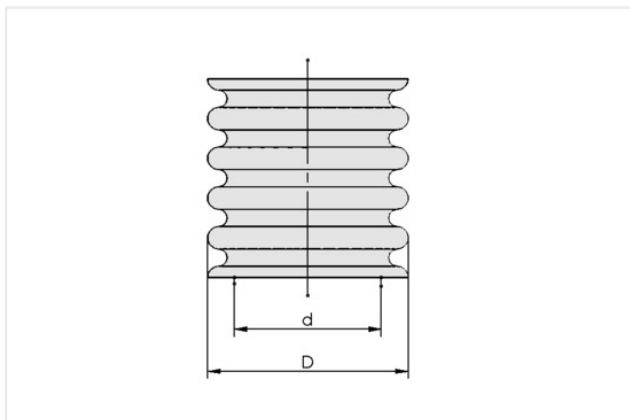

Attribute	Value
d	60 mm
D	71 mm

Technical Data

Attribute	Value
Hose type	71-60
Pressure range (operating pressure)	-0.69 ... 2.09 bar
Operating temperature	-40 ... 90 ° C
Bending radius min.	40 mm
Length max.	20 m
Weight/Meter	780 g/m
Weight/Meter	0.78 kg/m
Material hose	PU, wire spiral, antistatic

Contact Schmalz

Schmalz K.K. | 3001-7 Odana-cho, Tsuzuki-ku, 224-0027 Yokohama, Japan | +81 45 565 5150 | schmalz@schmalz.co.jp

Vacuum hose (meter)

VSL 71-60 PU-DS-AS TR

Part no.: 10.07.09.00034

<https://www.schmalz.co.jp/10.07.09.00034>

Product family

VSL

Note: Operating pressure: In reference to media and ambient temperature of + 20 ° C Min. bending radius: Referred to the inner side of the hose bend in a static state Max. length: Please indicate the tube length when placing the order!

Accessories



SSD 65-70 ST-VZ

Part no.: 10.07.10.00098

Clamping range: 65.0 ... 70.0 mm

Material: Steel

Surface: galvanised

Contact Schmalz

Schmalz K.K. | 3001-7 Odana-cho, Tsuzuki-ku, 224-0027 Yokohama, Japan | +81 45 565 5150 | schmalz@schmalz.co.jp