

Holder tooling suction Cup

HT-SG A2 I 10 31 NPT3/8-AG AB

Part no.: 10.07.06.00500

<https://www.schmalz.co.jp/10.07.06.00500>

Home > Vacuum Technology for Automation > Vacuum Components > Mounting Elements > Holder System for Tooling HT > Holders for Suction Cups HT-SG I > HT-SG A2 I 10 31 NPT3/8-AG AB

Holder for suction cup



Connection 1: Bolt with slot Ø19mm


Shape: integrated nozzle

Suction cup connection: NPT3/8-M

Vacuum connection: G1/8"-F

Add. function: Active blowing off

Design Data

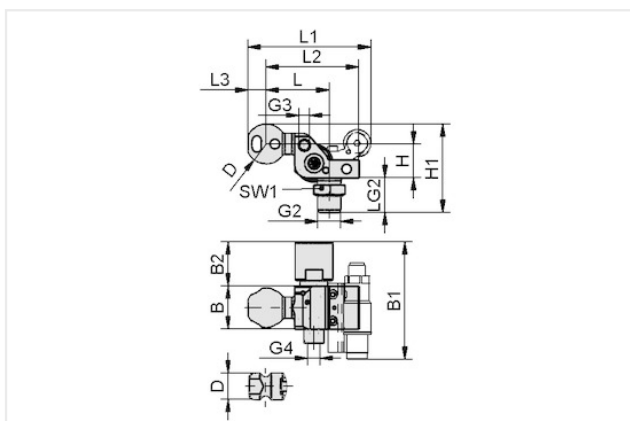

Attribute	Value
B	31 mm
B1	73 mm
B2	32 mm
D	19 mm
G2	NPT3/8-M
G3	G1/8"-F
G4	G1/8"-F
H	24.50 mm
H1	52 mm
L	39.30 mm
L1	72.50 mm
L2	60.80 mm
L3	11.70 mm
LG2	15 mm

Technical Data

Attribute	Value
Weight	136 g
Product family	HT-SG-I

Contact Schmalz

Schmalz K.K. | 3001-7 Odana-cho, Tsuzuki-ku, 224-0027 Yokohama, Japan | +81 45 565 5150 | schmalz@schmalz.co.jp

Holder tooling suction Cup

HT-SG A2 I 10 31 NPT3/8-AG AB

Part no.: 10.07.06.00500

<https://www.schmalz.co.jp/10.07.06.00500>

Accessories



STV-GE G1/8-AG 6

Part no.: 10.08.02.00204

Thread G1: G1/8"-M

Hose diameter: 6 mm

Material: Brass

Operating temperature: -20 ... 80 ° C

External diameter D: 11.4 mm

Length L: 16.4 mm



STV-W G1/8-AG 6

Part no.: 10.08.02.00288

Thread G1: G1/8"-M

Hose diameter: 6 mm

Material: Plastics

Operating temperature: ° C

Length L: 20.8 mm

Contact Schmalz

Schmalz K.K. | 3001-7 Odana-cho, Tsuzuki-ku, 224-0027 Yokohama, Japan | +81 45 565 5150 | schmalz@schmalz.co.jp