

## Spring plungers

FSTE-HDB G1/4-AG 25 VG-AB

Part no.: 10.01.02.01427

<https://www.schmalz.co.jp/10.01.02.01427>

Home > Vacuum Technology for Automation > Vacuum Components > Mounting Elements > Spring Plungers > Spring Plungers  
FSTE-HDB > FSTE-HDB G1/4-AG 25 VG-AB

### Spring plunger with damping and height compensation, heavy-duty and ball guided anti-rotation guard




Suction cup connection: G1/4"-M

Vacuum connection: G1/8"-F

Spring stroke Z: 25 mm

Shape mounting elements: with anti-rotation guard anti-block

## Design Data

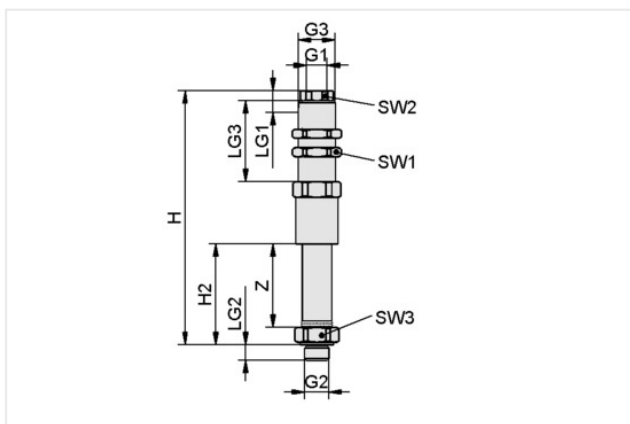

| Attribute  | Value     |
|------------|-----------|
| G1         | G1/8"-F   |
| G2         | G1/4"-M   |
| G3         | M20x1.5-M |
| H          | 118.30 mm |
| H2         | 34.80 mm  |
| LG1        | 12 mm     |
| LG2        | 8.50 mm   |
| LG3        | 44 mm     |
| SW1        | 24 mm     |
| SW2        | 17 mm     |
| SW3        | 22 mm     |
| Z (Stroke) | 25 mm     |

Recommendation: Avoid maximum plunger stroke Z during continuous operation to extend service life Ensure that the hose guide is free from distortion

## Technical Data

| Attribute               | Value                               |
|-------------------------|-------------------------------------|
| Shape mounting elements | with anti-rotation guard anti-block |
| Spring rate             | 0.71 N/mm                           |
| Spring pretension       | 3.06 N                              |

## Contact Schmalz

Schmalz K.K. | 3001-7 Odana-cho, Tsuzuki-ku, 224-0027 Yokohama, Japan | +81 45 565 5150 | [schmalz@schmalz.co.jp](mailto:schmalz@schmalz.co.jp)

## Spring plungers

FSTE-HDB G1/4-AG 25 VG-AB

Part no.: 10.01.02.01427

<https://www.schmalz.co.jp/10.01.02.01427>

|                       |              |
|-----------------------|--------------|
| Spring force, center  | 11.95 N      |
| Vertical load         | 2400 N       |
| Horizontal load       | 747 N        |
| Weight                | 235 g        |
| Operating temperature | 0 ... 80 ° C |
| Product family        | FSTE-HDB     |

Note: Spring force: Referred to 50 % of operating stroke Vertical load: Maximum static loading Horizontal load: The specification of the horizontal load refers to the lower edge of the plunger with extended spring. It is a maximum static stress and it impairs the spring compression and extension in horizontal position.

## Accessories



**FLK G1/4-IG G1/4-AG**

Part no.: 10.01.03.00178

Thread G1: G1/4"-F

Thread G2: G1/4"-M

Operating temperature: 0 ... 70 ° C



**KGL G1/4-IG G1/4-AG**

Part no.: 10.01.03.00110

Thread G1: G1/4"-F

Thread G2: G1/4"-M

Height H: 37.5 mm

## Contact Schmalz

Schmalz K.K. | 3001-7 Odana-cho, Tsuzuki-ku, 224-0027 Yokohama, Japan | +81 45 565 5150 | [schmalz@schmalz.co.jp](mailto:schmalz@schmalz.co.jp)

## Spring plungers

FSTE-HDB G1/4-AG 25 VG-AB

Part no. : 10.01.02.01427

<https://www.schmalz.co.jp/10.01.02.01427>



**KGL G1/4-IG M10x1.25-AG**

Part no. : 10.01.03.00137

Thread G1: G1/4"-F

Thread G2: M10x1.25-M

Height H: 37.5 mm



**FLK G1/4-IG M10x1.25-AG**

Part no. : 10.01.03.00206

Thread G1: G1/4"-F

Thread G2: M10x1.25-M

Operating temperature: 0 ... 70 ° C



**HTR-STA 55 1N D20 WI**

Part no. : 10.08.03.00086

Length L: 55 mm

Connection 1: Sliding block

Connection of suction cup, spring plunger: Contour D20-G1/4

Shape: angled

## Spring plungers

FSTE-HDB G1/4-AG 25 VG-AB

Part no.: 10.01.02.01427

<https://www.schmalz.co.jp/10.01.02.01427>



HTR-UNI 2N FSTE-HDB

Part no.: 10.01.03.00332

Operating temperature: ° C

Shape: for FSTE-HDB

Cross-beam connection: 2 T-slots



ST G1/8-AG 4 MS-ROH

Part no.: 10.08.03.00153

Thread G1: G1/8"-M

Hose diameter (rec.) d: 4 mm

Material: Brass

Surface: raw

Length L: 4 mm

Nominal diameter dn: 2.5 mm



ST G1/8-AG 6 MS-V

Part no.: 10.08.03.00154

Thread G1: G1/8"-M

Hose diameter (rec.) d: 6 mm

Material: Brass

Surface: nickel plated

Length L: 5 mm

Nominal diameter dn: 4.4 mm

### Contact Schmalz

Schmalz K.K. | 3001-7 Odana-cho, Tsuzuki-ku, 224-0027 Yokohama, Japan | +81 45 565 5150 | [schmalz@schmalz.co.jp](mailto:schmalz@schmalz.co.jp)

## Spring plungers

FSTE-HDB G1/4-AG 25 VG-AB

Part no.: 10.01.02.01427

<https://www.schmalz.co.jp/10.01.02.01427>



### ST G1/8-AG 9 MS-V

Part no.: 10.08.03.00155

Thread G1: G1/8"-M

Hose diameter (rec.) d: 9 mm

Material: Brass

Surface: nickel plated

Length L: 5 mm

Nominal diameter dn: 4 mm



### STV-GE G1/8-AG 4

Part no.: 10.08.02.00202

Thread G1: G1/8"-M

Hose diameter: 4 mm

Material: Brass

Operating temperature: -20 ... 80 ° C

External diameter D: 7.9 mm

Length L: 13.7 mm



### STV-GE G1/8-AG 6

Part no.: 10.08.02.00204

Thread G1: G1/8"-M

Hose diameter: 6 mm

Material: Brass

Operating temperature: -20 ... 80 ° C

External diameter D: 11.4 mm

Length L: 16.4 mm

## Contact Schmalz

Schmalz K.K. | 3001-7 Odana-cho, Tsuzuki-ku, 224-0027 Yokohama, Japan | +81 45 565 5150 | [schmalz@schmalz.co.jp](mailto:schmalz@schmalz.co.jp)

## Spring plungers

FSTE-HDB G1/4-AG 25 VG-AB

Part no.: 10.01.02.01427

<https://www.schmalz.co.jp/10.01.02.01427>



### STV-GE G1/8-AG 8

Part no.: 10.08.02.00206

Thread G1: G1/8"-M

Hose diameter: 8 mm

Material: Brass

Operating temperature: ° C

External diameter D: 14 mm

Length L: 20.7 mm



### STV-W G1/8-AG 4

Part no.: 10.08.02.00156

Thread G1: G1/8"-M

Hose diameter: 4 mm

Material: Nickel plated

Operating temperature: -20 ... 80 ° C

Length L: 16.4 mm



### STV-W G1/8-AG 6

Part no.: 10.08.02.00158

Thread G1: G1/8"-M

Hose diameter: 6 mm

Material: Nickel plated

Operating temperature: -20 ... 80 ° C

Length L: 20.1 mm

## Contact Schmalz

Schmalz K.K. | 3001-7 Odana-cho, Tsuzuki-ku, 224-0027 Yokohama, Japan | +81 45 565 5150 | [schmalz@schmalz.co.jp](mailto:schmalz@schmalz.co.jp)

## Spring plungers

FSTE-HDB G1/4-AG 25 VG-AB

Part no.: 10.01.02.01427

<https://www.schmalz.co.jp/10.01.02.01427>



**STV-W G1/8-AG 8**

Part no.: 10.08.02.00160

Thread G1: G1/8"-M

Hose diameter: 8 mm

Material: Nickel plated

Operating temperature: -20 ... 80 ° C

Length L: 24 mm



**STV-GE G1/8-AG 6 HT**

Part no.: 10.08.02.00389

Thread G1: G1/8"-M

Hose diameter: 6 mm

Material: Brass

Operating temperature: -20 ... 120 ° C

External diameter D: 11.6 mm

Length L: 19 mm



**STV-W G1/8-AG 6**

Part no.: 10.08.02.00288

Thread G1: G1/8"-M

Hose diameter: 6 mm

Material: Plastics

Operating temperature: ° C

Length L: 20.8 mm

### Contact Schmalz

Schmalz K.K. | 3001-7 Odana-cho, Tsuzuki-ku, 224-0027 Yokohama, Japan | +81 45 565 5150 | [schmalz@schmalz.co.jp](mailto:schmalz@schmalz.co.jp)

## Spring plungers

FSTE-HDB G1/4-AG 25 VG-AB

Part no.: 10.01.02.01427

<https://www.schmalz.co.jp/10.01.02.01427>



**STV-W G1/8-AG 6 HT**

Part no.: 10.08.02.00391

Thread G1: G1/8"-M

Hose diameter: 6 mm

Material: Brass

Operating temperature: -20 ... 120 ° C

Length L: 22.5 mm



**STV-WF G1/8-AG 4**

Part no.: 10.08.02.00166

Thread G1: G1/8"-M

Hose diameter: 4 mm

Material: Nickel plated

Operating temperature: -10 ... 70 ° C

Length L: 17.4 mm



**STV-WF G1/8-AG 6**

Part no.: 10.08.02.00168

Thread G1: G1/8"-M

Hose diameter: 6 mm

Material: Nickel plated

Operating temperature: -10 ... 70 ° C

Length L: 21.4 mm

### Contact Schmalz

Schmalz K.K. | 3001-7 Odana-cho, Tsuzuki-ku, 224-0027 Yokohama, Japan | +81 45 565 5150 | [schmalz@schmalz.co.jp](mailto:schmalz@schmalz.co.jp)

## Spring plungers

FSTE-HDB G1/4-AG 25 VG-AB

Part no.: 10.01.02.01427

<https://www.schmalz.co.jp/10.01.02.01427>



### STV-WF G1/8-AG 8

Part no.: 10.08.02.00170

Thread G1: G1/8"-M

Hose diameter: 8 mm

Material: Nickel plated

Operating temperature: -10 ... 70 ° C

Length L: 23.4 mm



### STV-WF G1/8-AG 10

Part no.: 10.08.02.00257

Thread G1: G1/8"-M

Hose diameter: 10 mm

Material: Nickel plated

Operating temperature: -10 ... 70 ° C

Length L: 25.2 mm



### STV-T G1/8-AG 4

Part no.: 10.09.02.00039

Thread G1: G1/8"-M

Hose diameter: 4 mm

Material: Brass

Operating temperature: ° C

Length L: 32.5 mm

## Contact Schmalz

Schmalz K.K. | 3001-7 Odana-cho, Tsuzuki-ku, 224-0027 Yokohama, Japan | +81 45 565 5150 | [schmalz@schmalz.co.jp](mailto:schmalz@schmalz.co.jp)

## Spring plungers

FSTE-HDB G1/4-AG 25 VG-AB

Part no.: 10.01.02.01427

<https://www.schmalz.co.jp/10.01.02.01427>



### STV-T G1/8-AG 6

Part no.: 10.09.02.00040

Thread G1: G1/8"-M

Hose diameter: 6 mm

Material: Brass

Operating temperature: ° C

Length L: 41.5 mm



### STV-T G1/8-AG 8

Part no.: 10.09.02.00041

Thread G1: G1/8"-M

Hose diameter: 8 mm

Material: Brass

Operating temperature: ° C

Length L: 48.7 mm

## Contact Schmalz

Schmalz K.K. | 3001-7 Odana-cho, Tsuzuki-ku, 224-0027 Yokohama, Japan | +81 45 565 5150 | [schmalz@schmalz.co.jp](mailto:schmalz@schmalz.co.jp)