

Feed ejector

SEC-400 A2

Part no.: 10.02.01.01620

<https://www.schmalz.co.jp/10.02.01.01620>

Home > Vacuum Technology for Automation > Vacuum Components > Special Grippers > Feed Ejectors > Feed Ejectors SEC > SEC-400 A2


Powerful ejector for very porous parts



Suction rate (max.): 135 m³/h

Material: Aust. Stainless steel

Design Data

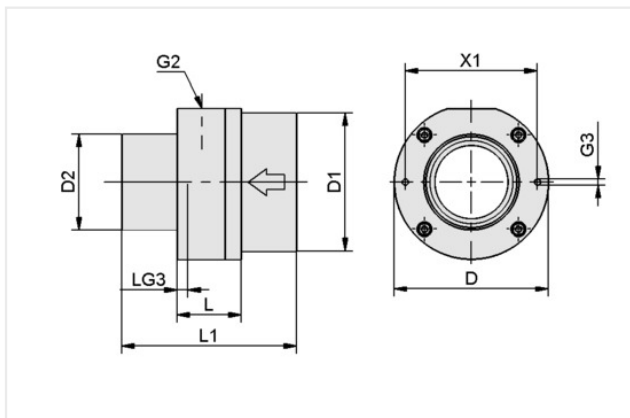

Attribute	Value
D	84 mm
D1	75 mm
D2	52 mm
G2	
G3	
L	35 mm
L1	95 mm
LG3	14 mm
X1	72 mm

Technical Data

Attribute	Value
Max. vacuum	-25 mbar
Suction rate (max.)	2250 l/min
Suction rate (max.)	135 m ³ /h
Air consumption suction	500 l/min
Air consumption suction	26.70 m ³ /h
Pressure range (operating pressure)	2.0 ... 6.0 bar
Operating temperature	° C
Material	Aust. Stainless steel

Contact Schmalz

Schmalz K.K. | 3001-7 Odana-cho, Tsuzuki-ku, 224-0027 Yokohama, Japan | +81 45 565 5150 | schmalz@schmalz.co.jp

Feed ejector

SEC-400 A2

Part no.: 10.02.01.01620

<https://www.schmalz.co.jp/10.02.01.01620>

Weight	1.48 kg
Max. vacuum	-0.74 inHg
Suction rate (max.)	79.46 cfm
Air consumption suction	17.66 cfm
Pressure range (operating pressure)	29.0 ... 87.0
Product family	SEC

Note: Air consumption: At optimal operating pressure (4,5 bar)
