

Solenoid valve pressure

EMV 1.5 24V-DC 3/2 NC K-2P

Part no.: 10.05.01.00288

<https://www.schmalz.co.jp/10.05.01.00288>

Home > Vacuum Technology for Automation > Vacuum Components > Special Grippers > Thin Glass Grippers > Accessories STGG
> EMV 1.5 24V-DC 3/2 NC K-2P

Solenoid valve EMV for direct control of compressed air



Nominal size: 1.5 mm

Voltage DC: 24V – DC

Function: 3/2-way valve


Control valve: Normally closed

Connecting thread: M5-M

Pressure range (operating pressure): 3.5 ... 7.0 bar

Interface electrical connection: Cable, 2 pol

Design Data

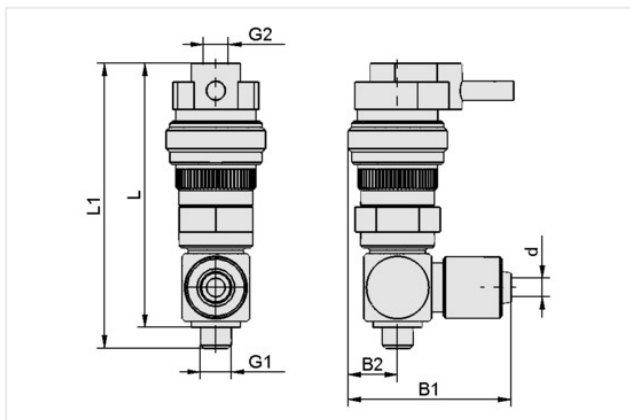

Attribute	Value
B1	26.60 mm
B2	8.10 mm
d	4 mm
G1	M5-M
G2	M5-F
L	43.10 mm
L1	46.50 mm

Technical Data

Attribute	Value
Nominal size	1.50 mm
Control valve	Normally closed
Nominal flow rate	45 l/min
Nominal flow rate	2.70 m ³ /h
Voltage DC	24V – DC
Weight	0.07 kg
Product family	EMV

Contact Schmalz

Schmalz K.K. | 3001-7 Odana-cho, Tsuzuki-ku, 224-0027 Yokohama, Japan | +81 45 565 5150 | schmalz@schmalz.co.jp



Solenoid valve pressure

EMV 1.5 24V-DC 3/2 NC K-2P

Part no.: 10.05.01.00288

<https://www.schmalz.co.jp/10.05.01.00288>

Contact Schmalz

Schmalz K.K. | 3001-7 Odana-cho, Tsuzuki-ku, 224-0027 Yokohama, Japan | +81 45 565 5150 | schmalz@schmalz.co.jp