

Vacuum pump

EVE-TR 60 AC3 IE3-TYP2 F

Part no.: 10.03.01.00336

<https://www.schmalz.co.jp/10.03.01.00336>


Home > Vacuum Technology for Automation > Vacuum Components > Vacuum Generators > Vacuum Pumps > Dry-Running Vacuum Pumps EVE-TR > EVE-TR 60 AC3 IE3-TYP2 F

Oil-free pump with constant suction rate, robust, requires little maintenance



Current type: three-phase current
Voltage at 60Hz: YY230/Y460V $\pm 10\%$
Suction rate (60 Hz): 66 m³/h
Rated power 60 Hz: 2.6 kW
Construction: IE3:US/CAN
with: Filter
Permission: UL/CSA
Weight: 85.5 kg

Design Data

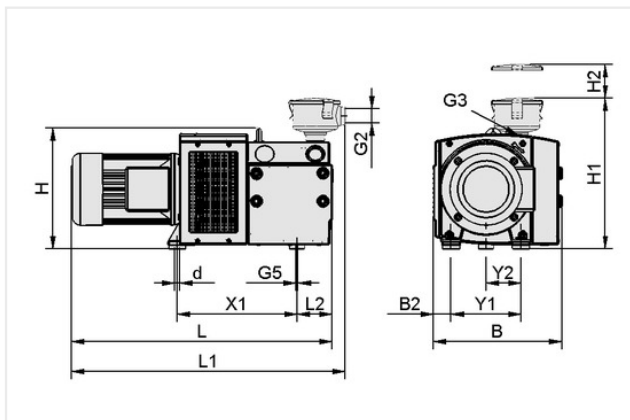

Attribute	Value
B	353 mm
B2	46 mm
d	12 mm
G2	G1-1/4"-F
G3	G1"-F
G5	M8-F
H	328 mm
H1	415 mm
H2	75 mm
L	747 mm
L1	782 mm
L2	96 mm
X1	326 mm
Y1	190 mm
Y2	95 mm

Technical Data

Attribute	Value
Suction rate (60 Hz)	66 m ³ /h
Voltage at 60Hz	YY230/Y460V $\pm 10\%$

Contact Schmalz

Schmalz K.K. | 3001-7 Odana-cho, Tsuzuki-ku, 224-0027 Yokohama, Japan | +81 45 565 5150 | schmalz@schmalz.co.jp

Vacuum pump

EVE-TR 60 AC3 IE3-TYP2 F

Part no.: 10.03.01.00336

<https://www.schmalz.co.jp/10.03.01.00336>

Rated power 60 Hz	2.60 kW
Current type	AC3
Current type	three-phase current
Construction	IE3:US/CAN
Weight	85.50 kg
Protection type IP	IP 55
Product family	EVE-TR

Noise level according to DIN EN ISO 3744 (uncertainty factor KpA = 3 dB(A)), interval of 1 m, at medium load, both connection sides piped

Spare parts



FILT-EINS 3 98x70 PAP STF-1-1/4-IGN

Part no.: 10.07.01.00018

Filter pore size: 3 µm

External diameter D: 98 mm

Length L: 70 mm

Filter material: Paper

Construction use: Dust filter STF

Size: 1-1/4-IGN



VST EVE-TR60/TR80

Part no.: 22.09.01.00031

Construction use: Pump EVE

Size: TR60/TR80

contains: Brush slide

and: Filter

Contact Schmalz

Schmalz K.K. | 3001-7 Odana-cho, Tsuzuki-ku, 224-0027 Yokohama, Japan | +81 45 565 5150 | schmalz@schmalz.co.jp