

Vacuum pump

EVE-OG 16 AC3 F

Part no.: 10.03.02.00083

<https://www.schmalz.co.jp/10.03.02.00083>

Home > Vacuum Technology for Automation > Vacuum Components > Vacuum Generators > Vacuum Pumps > Oil-Lubricated Vacuum Pumps EVE-OG > EVE-OG 16 AC3 F

Oil-lubricated pump for maximum vacuum levels, requires little maintenance



Suction rate (60 Hz): 19 m³/h

Current type: three-phase current

Sound level at 50 Hz: 44 dB(A)

with: Filter

Suction rate (50 Hz): 16 m³/h


Rated power 50 Hz: 0.5 kW

Voltage at 50Hz: 230/400V AC

Voltage at 60Hz: 230/400V – AC

Weight: 19.6 kg

Design Data

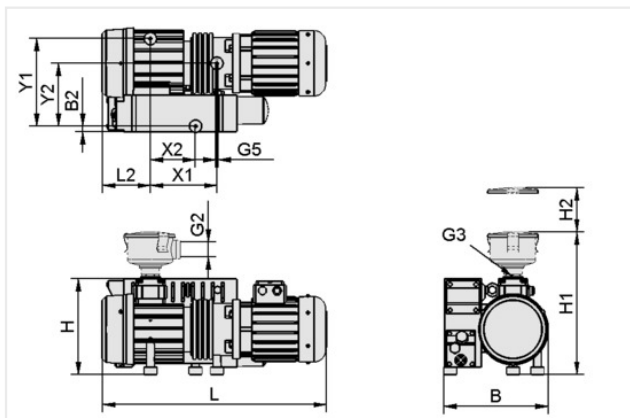

Attribute	Value
B	215 mm
B2	26 mm
G2	G3/4"-F
G3	G3/4"-F
G5	M8-F
H	215.50 mm
H1	305 mm
H2	70 mm
L	435 mm
L2	63 mm
X1	176 mm
Y1	111 mm
Y2	107 mm

Technical Data

Attribute	Value
Max. vacuum	-980 mbar
Max. vacuum	-28.94 inHg
Suction rate (50 Hz)	16 m ³ /h
Voltage at 50Hz	230/400V AC

Contact Schmalz

Schmalz K.K. | 3001-7 Odana-cho, Tsuzuki-ku, 224-0027 Yokohama, Japan | +81 45 565 5150 | schmalz@schmalz.co.jp

Vacuum pump

EVE-OG 16 AC3 F

Part no.: 10.03.02.00083

<https://www.schmalz.co.jp/10.03.02.00083>

Rated power 50 Hz	0.50 kW
Sound level at 50 Hz	44 dB(A)
Weight	19.60 kg
Protection type IP	IP 55
Current type	AC3
Product family	EVE-OG

Accessories



DRM 40 P1 H

Part no.: 10.07.02.00050

External diameter D: 40 mm

Measuring range: 0,0 ... 1,0 bar

Construction shape manometers: Connection at rear

Thread G1: G3/4"-M



OEL EVE-OG 1L ANDEROL 555

Part no.: 27.02.01.00055

Construction use: Pump EVE-OG

Contact Schmalz

Schmalz K.K. | 3001-7 Odana-cho, Tsuzuki-ku, 224-0027 Yokohama, Japan | +81 45 565 5150 | schmalz@schmalz.co.jp

Vacuum pump

EVE-OG 16 AC3 F

Part no. : 10.03.02.00083

<https://www.schmalz.co.jp/10.03.02.00083>



ZUB EVE-OG Ölaltass-Kit

Part no. : 22.09.03.00038

Construction use: Pump EVE-OG

Contact Schmalz

Schmalz K.K. | 3001-7 Odana-cho, Tsuzuki-ku, 224-0027 Yokohama, Japan | +81 45 565 5150 | schmalz@schmalz.co.jp