

Bellows suction cups (round)

FSG 52 HT1-60 G1/4-IG

Part no.: 10.01.06.02388

<https://www.schmalz.co.jp/10.01.06.02388>

Home > Vacuum Technology for Automation > Vacuum Components > Vacuum Suction Cups > Bellows Suction Cups (Round) > Bellows Suction Cups FSG (2.5 Folds) > FSG 52 HT1-60 G1/4-IG

Bellows suction cup (round) for very uneven workpieces



Size: 52

Suction cup material: High temperature material HT1


Material hardness [Shore A]: 60 Shore A

Connection: G1/4"-F

Number of folds: 2.5

Vacuum connection: G1/4"-F

Design Data

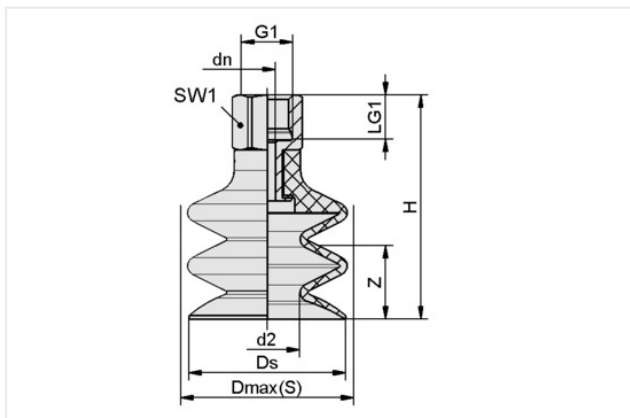

Attribute	Value
d2	24.60 mm
dn	4.40 mm
Dmax (S)	55 mm
Ds	52.50 mm
G1	G1/4"-F
H	63.70 mm
LG1	12 mm
SW1	17 mm
Z (Stroke)	25 mm

Note: Acceptable dimensional tolerances for elastomer parts concerning to DIN ISO 3302-1 M3

Technical Data

Attribute	Value
Suction cup material	High temperature material HT1
Material hardness [Shore A]	60 Shore A
Size	52
Number of folds	2.50
Connection	G1/4-IG
Curve radius (min) (convex)	75 mm
Volume	35 cm ³

Contact Schmalz

Schmalz K.K. | 3001-7 Odana-cho, Tsuzuki-ku, 224-0027 Yokohama, Japan | +81 45 565 5150 | schmalz@schmalz.co.jp

Bellows suction cups (round)

FSG 52 HT1-60 G1/4-IG

Part no.: 10.01.06.02388

<https://www.schmalz.co.jp/10.01.06.02388>

Suction force (-600mbar) 28.52 N

Pull-off force 96 N

Hose diameter (rec.) d 6 mm

Weight 32.30 g

Product family FSG

Note: Suction force: The specified suction forces are theoretical values at a vacuum of -0.6 bar and with a dry, smooth and flat workpiece surface – they do not include a safety factor Pull-off force: The pull-off force of the versions made of natural rubber is reduced by about 40% Hose diameter: The recommended hose diameter refers to a hose length of approx. 2 m

Accessories



DR 52/33x5 MOS SI-15

Part no.: 10.01.06.02548

External diameter D: 52 mm

Internal diameter d: 33 mm

Height H: 5 mm

Material type: Foam rubber

Sealing material: Silicone SI

Material hardness [Shore A]: 15 Shore A



FD 44 120

Part no.: 10.01.06.02573

External diameter D: 44 mm

Filter pore size: 120 µm

Construction use: Bellows suction cup

Size: FG 52

Bellows suction cups (round)

FSG 52 HT1-60 G1/4-IG

Part no.: 10.01.06.02388

<https://www.schmalz.co.jp/10.01.06.02388>



SU 50

Part no.: 10.01.01.12837

Size: 50

Clamping range: 45.0 ... 60.0 mm

Temperature resistance: 80 ° C

Spare parts



SA-NIP N018 G1/4-IG DN440

Part no.: 10.01.06.01066

Nipple family: N 018

Thread G1: G1/4"-F


Length L1: 28.8 mm

Fitting length: 15 mm

Nominal diameter dn: 4.4 mm

Spanner size SW2: 5 mm

Material: Aluminum

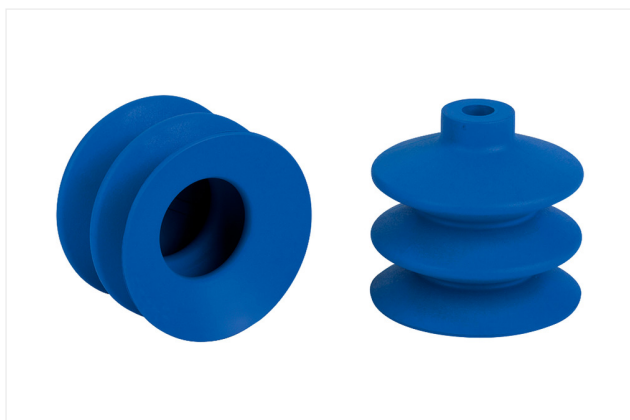

FG 52 HT1-60 N018

Part no.: 10.01.06.02365

Size: 52

Suction cup material: High temperature material HT1

Material hardness [Shore A]: 60 Shore A

Number of folds: 2.5

Contact Schmalz

Schmalz K.K. | 3001-7 Odana-cho, Tsuzuki-ku, 224-0027 Yokohama, Japan | +81 45 565 5150 | schmalz@schmalz.co.jp