

## Bellows suction cup (round)

SAB 80 NBR-60 M16-AG

Part no.: 10.01.06.03631

<https://www.schmalz.co.jp/10.01.06.03631>

Home > Vacuum Technology for Automation > Vacuum Components > Vacuum Suction Cups > Bellows Suction Cups (Round) > Bellows Suction Cups SAB (1.5 Folds) > SAB 80 NBR-60 M16-AG

### Bellows suction cup (round) for very dynamic handling of smooth and oily workpieces



Size: 80

Suction cup material: Nitrile rubber NBR


Material hardness [Shore A]: 60 Shore A

Nipple material: Aluminum

Connection: M16-AG

Number of folds: 1.5

### Design Data

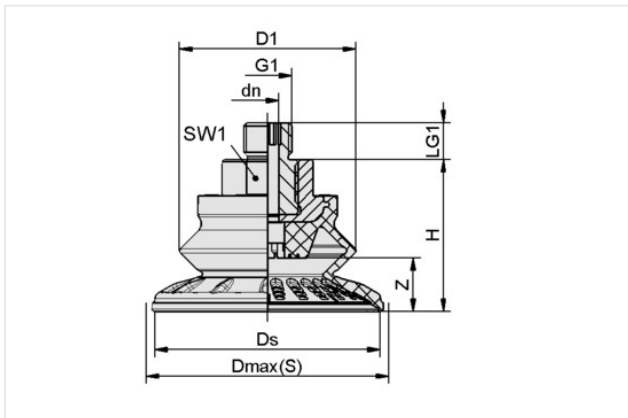

| Attribute  | Value    |
|------------|----------|
| dn         | 6 mm     |
| D1         | 63.60 mm |
| Dmax (S)   | 89 mm    |
| Ds         | 81.10 mm |
| G1         | M16-M    |
| H          | 49.90 mm |
| LG1        | 10 mm    |
| SW1        | 22 mm    |
| Z (Stroke) | 22.10 mm |

Note: Acceptable dimensional tolerances for elastomer parts concerning to DIN ISO 3302-1 M3

### Technical Data

| Attribute                    | Value                 |
|------------------------------|-----------------------|
| Suction force (-600mbar)     | 135 N                 |
| Pull-off force               | 221 N                 |
| Lateral force                | 205 N                 |
| Lateral force (oily surface) | 140 N                 |
| Volume                       | 67.60 cm <sup>3</sup> |
| Curve radius (min) (convex)  | 75 mm                 |
| Hose diameter (rec.) d       | 6 mm                  |

### Contact Schmalz

Schmalz K.K. | 3001-7 Odana-cho, Tsuzuki-ku, 224-0027 Yokohama, Japan | +81 45 565 5150 | [schmalz@schmalz.co.jp](mailto:schmalz@schmalz.co.jp)

## Bellows suction cup (round)

SAB 80 NBR-60 M16-AG

Part no.: 10.01.06.03631

<https://www.schmalz.co.jp/10.01.06.03631>

|                             |                    |
|-----------------------------|--------------------|
| Size                        | 80                 |
| Suction cup material        | Nitrile rubber NBR |
| Material hardness [Shore A] | 60 Shore A         |
| Weight                      | 73.10 g            |
| Product family              | SAB                |
| Number of folds             | 1.50               |

Note: Suction force: The specified suction forces are theoretical values at a vacuum of -0.6 bar and with a dry, smooth and flat workpiece surface – they do not include a safety factor Lateral force: The specified lateral forces are values measured at a vacuum of -0.6 bar with a dry or oily, smooth, flat workpiece surface. Depending on the workpiece surface and its quality, the actual values may deviate from these values Hose diameter: The recommended hose diameter refers to a hose length of approx. 2 m