

Bellows suction cup HT2 (round)

SAB 22 HT2-65 G3/8-IG

Part no.: 10.01.06.02421

<https://www.schmalz.co.jp/10.01.06.02421>

Home > Bellows Suction Cups SAB HT2 (1.5 Folds) > SAB 22 HT2-65 G3/8-IG

Bellows suction cup (round) for handling hot workpieces



Size: 22

Suction cup material: High temperature material HT2

Material hardness [Shore A]: 65 Shore A


Temperature resistance: 200 ° C

Nipple material: Nickel plated

Connection: G3/8-IG

Number of folds: 1.5

Design Data

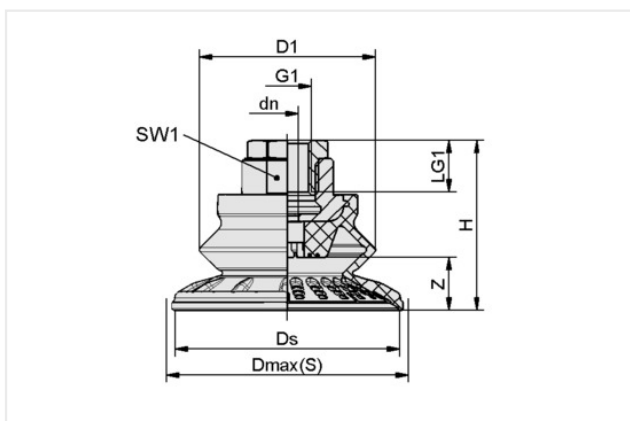

Attribute	Value
dn	3.50 mm
D1	22 mm
Dmax (S)	24 mm
Ds	20.60 mm
G1	G3/8"-F
H	41 mm
LG1	9.50 mm
SW1	22 mm
Z (Stroke)	5.80 mm

Technical Data

Attribute	Value
Suction force (-600mbar)	16 N
Pull-off force	24 N
Lateral force	17 N
Volume	1.50 cm ³
Curve radius (min) (convex)	20 mm
Hose diameter (rec.) d	4 mm
Size	22
Connection	G3/8"-F
Suction cup material	High temperature material HT2

Contact Schmalz

Schmalz K.K. | 3001-7 Odana-cho, Tsuzuki-ku, 224-0027 Yokohama, Japan | +81 45 565 5150 | schmalz@schmalz.co.jp

Bellows suction cup HT2 (round)

SAB 22 HT2-65 G3/8-IG

Part no.: 10.01.06.02421

<https://www.schmalz.co.jp/10.01.06.02421>

Material hardness [Shore A]	65 Shore A
Weight	42.80 g
Number of folds	1.50
Product family	SAB
