

Flat suction cup (round)

SUF 40 SI-55 G1/8-AG

Part no.: 10.01.01.14099

<https://www.schmalz.co.jp/10.01.01.14099>

Home > Flat Suction Cups SUF > SUF 40 SI-55 G1/8-AG

Flat suction cup (round) for process safe handling of smooth or slightly rough surfaces



Size: 40


Suction cup material: Silicone SI

Material hardness [Shore A]: 55 Shore A

Material characteristics: FDA-compatible

Vacuum connection: G1/8"-M

Design Data

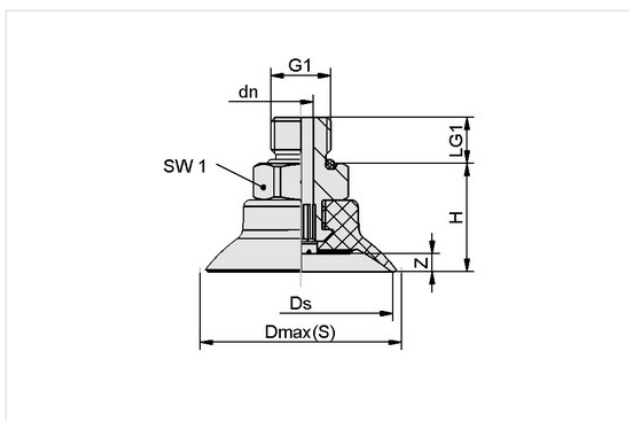

Attribute	Value
Dmax (S)	44 mm
Ds	40 mm
dn	4.10 mm
G1	G1/8"-M
H	23.20 mm
LG1	7.50 mm
SW1	17 mm
Z (Stroke)	4 mm

Technical Data

Attribute	Value
Suction force (-600mbar)	61 N
Pull-off force	61 N
Volume	3.80 cm ³
Curve radius (min) (convex)	50 mm
Hose diameter (rec.) d	4 mm
Size	40
Suction cup material	Silicone SI
Material hardness [Shore A]	55 Shore A
Weight	17.10 g

Contact Schmalz

Schmalz K.K. | 3001-7 Odana-cho, Tsuzuki-ku, 224-0027 Yokohama, Japan | +81 45 565 5150 | schmalz@schmalz.co.jp

Flat suction cup (round)

SUF 40 SI-55 G1/8-AG

Part no.: 10.01.01.14099

<https://www.schmalz.co.jp/10.01.01.14099>

Product family	SUF
Number of folds	0

Note: Suction force: The specified suction forces are theoretical values at a vacuum of -0.6 bar and with a dry, smooth and flat workpiece surface – they do not include a safety factor Hose diameter: The recommended hose diameter refers to a hose length of approx. 2 m

Spare parts



SC 050 G1/8-AG

Part no.: 10.01.06.04250

Connection geometry: 050

Vacuum connection: G1/8"-M

Fitting length: 7.2 mm

Nominal diameter dn: 4.1 mm



SUF 40 SI-55 SC050

Part no.: 10.01.01.13973

Size: 40

Suction cup material: Silicone SI

Material characteristics: FDA-compatible

Material hardness [Shore A]: 55 Shore A

Contact Schmalz

Schmalz K.K. | 3001-7 Odana-cho, Tsuzuki-ku, 224-0027 Yokohama, Japan | +81 45 565 5150 | schmalz@schmalz.co.jp