

Flat suction cup (round)

SUF 25 NBR-55 SC040

Part no.: 10.01.01.13948

<https://www.schmalz.co.jp/10.01.01.13948>

Home > Vacuum Technology for Automation > Vacuum Components > Vacuum Suction Cups > Flat Suction Cups (Round) > SUF 25 NBR-55 SC040

Flat suction cup (round) f. process- safe handling of smooth or slightly rough surfaces




Size: 25

Suction cup material: Nitrile rubber NBR

Material hardness [Shore A]: 55 Shore A

Design Data

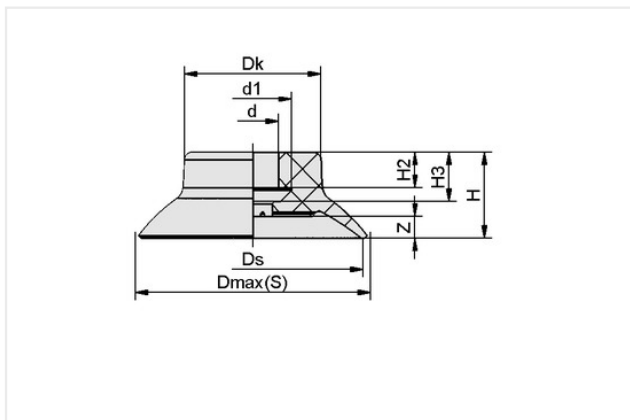

Attribute	Value
d1	10.50 mm
d	7 mm
Dk	15.50 mm
Dmax (S)	28.20 mm
Ds	25 mm
H	11.20 mm
H2	4.80 mm
H3	6.70 mm
Z (Stroke)	2.50 mm

Technical Data

Attribute	Value
Suction force (-600mbar)	23 N
Pull-off force	23 N
Volume	0.90 cm ³
Curve radius (min) (convex)	25 mm
Size	25
Nipple family	SC040
Suction cup material	Nitrile rubber NBR
Material hardness [Shore A]	55 Shore A

Contact Schmalz

Schmalz K.K. | 3001-7 Odana-cho, Tsuzuki-ku, 224-0027 Yokohama, Japan | +81 45 565 5150 | schmalz@schmalz.co.jp

Flat suction cup (round)

SUF 25 NBR-55 SC040

Part no.: 10.01.01.13948

<https://www.schmalz.co.jp/10.01.01.13948>

Weight	2.50 g
Product family	SUF

Note: Suction force: The specified suction forces are theoretical values at a vacuum of -0.6 bar and with a smooth, dry workpiece surface – they do not include a safety factor Hose diameter: The recommended hose diameter refers to a hose length of approx. 2 m

Accessories



SC 040 G1/8-AG

Part no.: 10.01.06.02490

Connection geometry: 040
Connection: G1/8"-M
Length L1: 20.2 mm
Fitting length: 6 mm
Nominal diameter dn: 4.1 mm



SC 040 G1/8-IG

Part no.: 10.01.06.02482

Connection geometry: 040
Connection: G1/8"-F
Length L1: 20.7 mm
Fitting length: 14 mm
Nominal diameter dn: 4.1 mm

Contact Schmalz

Schmalz K.K. | 3001-7 Odana-cho, Tsuzuki-ku, 224-0027 Yokohama, Japan | +81 45 565 5150 | schmalz@schmalz.co.jp