

Bell suction cup (round)

SAX 60 ED-85 G3/8-IG

Part no.: 10.01.19.00152

<https://www.schmalz.co.jp/10.01.19.00152>

Home > Vacuum Technology for Automation > Vacuum Components > Vacuum Suction Cups > Suction Cups for Handling Sheet Metal > Bell-Shaped Suction Cups SAX > SAX 60 ED-85 G3/8-IG

Bell suction cup (round) for best adaptation to strongly curved surfaces



Size: 60


Suction cup material: Elastodur ED

Material hardness [Shore A]: 85 Shore A

Connection: G3/8"-F

Number of folds: 0

Design Data

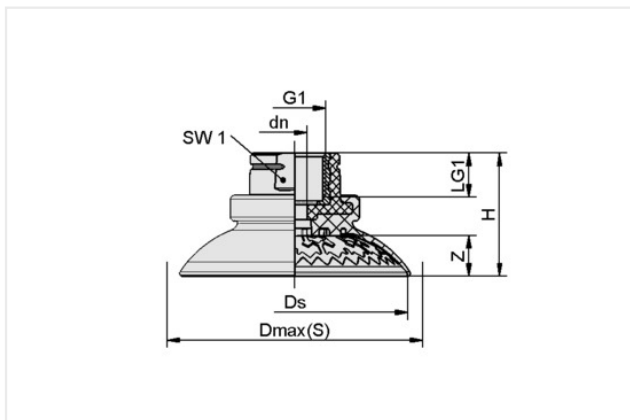

Attribute	Value
dn	6.75 mm
Dmax (S)	69.70 mm
Ds	61.50 mm
G1	G3/8"-F
H	33.40 mm
LG1	12 mm
SW1	22 mm
Z (Stroke)	10.90 mm

Technical Data

Attribute	Value
Suction force (-600mbar)	154 N
Lateral force	107 N
Lateral force (oily surface)	155 N
Volume	25.20 cm ³
Curve radius (min) (convex)	30 mm
Size	60
Connection	G3/8"-F
Number of folds	0

Contact Schmalz

Schmalz K.K. | 3001-7 Odana-cho, Tsuzuki-ku, 224-0027 Yokohama, Japan | +81 45 565 5150 | schmalz@schmalz.co.jp

Bell suction cup (round)

SAX 60 ED-85 G3/8-IG

Part no.: 10.01.19.00152

<https://www.schmalz.co.jp/10.01.19.00152>

Suction cup material	Elastodur ED
Material hardness [Shore A]	85 Shore A
Weight	29.50 g
Product family	SAX

Product recommendations



HT-SG A3 I 10 31 G3/8-AG AB

Part no.: 10.07.06.00356

Connection 1: Ball head 28.5 mm

Shape: integrated nozzle

Suction cup connection: G3/8"-M

Vacuum connection: G1/8"-F

Add. function: Active blowing off



FSTE-HDB G3/8-AG 25 VG-AB

Part no.: 10.01.02.01436

Suction cup connection: G3/8"-M

Vacuum connection: G1/8"-F

Spring stroke Z: 25 mm

Shape mounting elements: with anti-rotation guard
anti-block

Contact Schmalz

Schmalz K.K. | 3001-7 Odana-cho, Tsuzuki-ku, 224-0027 Yokohama, Japan | +81 45 565 5150 | schmalz@schmalz.co.jp

Bell suction cup (round)

SAX 60 ED-85 G3/8-IG

Part no.: 10.01.19.00152

<https://www.schmalz.co.jp/10.01.19.00152>



SAB 60 NBR-60 G3/8-IG

Part no.: 10.01.06.00674

Size: 60

Suction cup material: Nitrile rubber NBR

Material hardness [Shore A]: 60 Shore A

Nipple material: Aluminum

Connection: G3/8-IG

Number of folds: 1.5

Contact Schmalz

Schmalz K.K. | 3001-7 Odana-cho, Tsuzuki-ku, 224-0027 Yokohama, Japan | +81 45 565 5150 | schmalz@schmalz.co.jp