

## Flat suction cup (round)

SAF 40 HT2-65 G3/8-IG

Part no.: 10.01.01.12354

<https://www.schmalz.co.jp/10.01.01.12354>

Home > Vacuum Technology for Automation > Vacuum Components > Vacuum Suction Cups > Suction Cups for High-Temperature Applications > Flat Suction Cups SAF HT2 > SAF 40 HT2-65 G3/8-IG

### Flat suction cup (round) for very dynamic handling



Size: 40

Suction cup material: High temperature material HT2


Material hardness [Shore A]: 65 Shore A

Temperature resistance: 200 ° C

Nipple material: Nickel plated

Connection: G3/8-IG

### Design Data

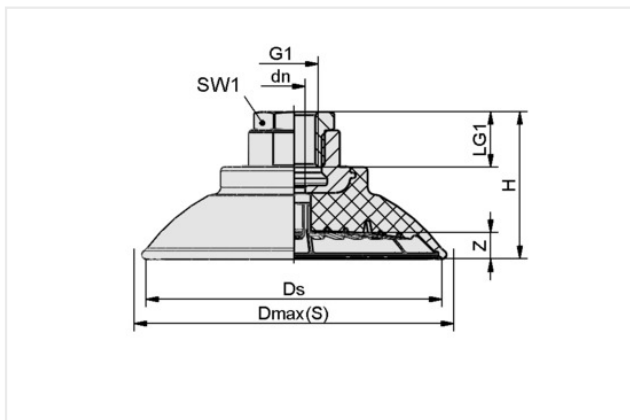

| Attribute  | Value   |
|------------|---------|
| dn         | 4 mm    |
| Ds         | 41 mm   |
| Dmax (S)   | 46 mm   |
| G1         | G3/8"-F |
| H          | 38 mm   |
| LG1        | 9 mm    |
| SW1        | 22 mm   |
| Z (Stroke) | 4 mm    |

### Technical Data

| Attribute                | Value   |
|--------------------------|---------|
| Number of folds          | 0       |
| Size                     | 40      |
| Suction force (-600mbar) | 69 N    |
| Temperature resistance   | 200 ° C |
| Product family           | SAF     |

### Contact Schmalz

Schmalz K.K. | 3001-7 Odana-cho, Tsuzuki-ku, 224-0027 Yokohama, Japan | +81 45 565 5150 | [schmalz@schmalz.co.jp](mailto:schmalz@schmalz.co.jp)

## Flat suction cup (round)

SAF 40 HT2-65 G3/8-IG

Part no. : 10.01.01.12354

<https://www.schmalz.co.jp/10.01.01.12354>

### Accessories



#### SU 40

Part no. : 10.01.01.12856

Size: 40

Clamping range: 35.0 ... 45.0 mm

Temperature resistance: 80 ° C

### Contact Schmalz

Schmalz K.K. | 3001-7 Odana-cho, Tsuzuki-ku, 224-0027 Yokohama, Japan | +81 45 565 5150 | [schmalz@schmalz.co.jp](mailto:schmalz@schmalz.co.jp)