

Bellows suction cup (round)

SPB1 10 ED-65 SC030

Part no.: 10.01.06.02782

<https://www.schmalz.co.jp/10.01.06.02782>

Home > Vacuum Technology for Automation > Vacuum Components > Vacuum Suction Cups > Suction Cups for the Packaging Industry > SPB1 10 ED-65 SC030

Bellows suction cup (round) with 1.5 corr. for dynamic handling of cardboard and rigid packaging




Size: 10

Suction cup material: Elastodur ED

Material hardness [Shore A]: 65 Shore A

Number of folds: 1.5

Design Data

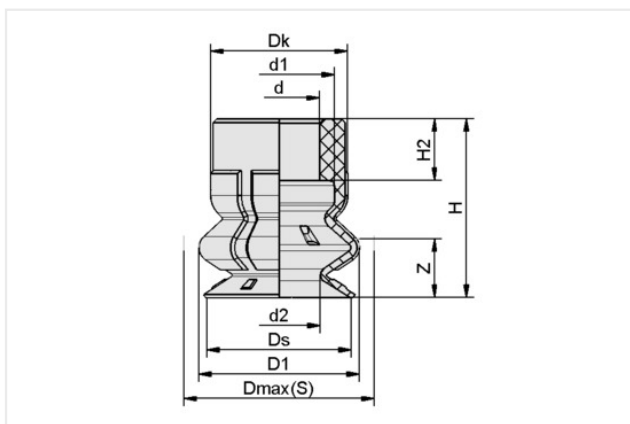

Attribute	Value
d	5.50 mm
d1	7.50 mm
d2	5.60 mm
D1	11 mm
Dk	9.40 mm
Dmax (S)	11.30 mm
Ds	9.80 mm
H	12.10 mm
H2	4.20 mm
Z (Stroke)	4 mm

Note: Acceptable dimensional tolerances for elastomer parts concerning to DIN ISO 3302-1 M3

Technical Data

Attribute	Value
Suction force (-600mbar)	1.50 N
Pull-off force	4 N
Lateral force	2 N
Volume	0.45 cm ³
Curve radius (min) (convex)	5 mm
Hose diameter (rec.) d	4 mm

Contact Schmalz

Schmalz K.K. | 3001-7 Odana-cho, Tsuzuki-ku, 224-0027 Yokohama, Japan | +81 45 565 5150 | schmalz@schmalz.co.jp

Bellows suction cup (round)

SPB1 10 ED-65 SC030

Part no.: 10.01.06.02782

<https://www.schmalz.co.jp/10.01.06.02782>

Size	10
Nipple family	SC 030
Number of folds	1.50
Suction cup material	Elastodur ED
Material hardness [Shore A]	65 Shore A
Weight	0.40 g
Product family	SPB1

Note: Suction force: The specified suction forces are theoretical values at a vacuum of -0.6 bar and with a dry, smooth and flat workpiece surface - they do not include a safety factor Hose diameter: The recommended hose diameter refers to a hose length of approx. 2 m

Accessories



SC 030 M5-AG

Part no.: 10.01.06.02802

Connection geometry: 030

Connection: M5-M

Length L1: 15.5 mm

Fitting length: 5 mm

Nominal diameter dn: 1.8 mm



SPI 8 PA SPB1-10

Part no.: 10.01.06.03710

Size: 8

Material: Polyamide

Use: SPB1-10

Contact Schmalz

Schmalz K.K. | 3001-7 Odana-cho, Tsuzuki-ku, 224-0027 Yokohama, Japan | +81 45 565 5150 | schmalz@schmalz.co.jp