

Solenoid valve

EMV 3 24V-DC 2/2 NC

Part no.: 10.05.01.00066

<https://www.schmalz.co.jp/10.05.01.00066>

Home > Vacuum Technology for Automation > Vacuum Components > Valve Technology > Solenoid Valves > Solenoid Valves EMV > EMV 3 24V-DC 2/2 NC

Solenoid valve EMV for direct control of vacuum and compressed air



Nominal size: 3 mm

Voltage DC: 24V – DC

Function: 2/2-way valve


Control valve: Normally closed

Connecting thread: G1/4"-F

Pressure range (operating pressure): -1.00 ... 9.00 bar

Power consumption DC: 5 W

Design Data

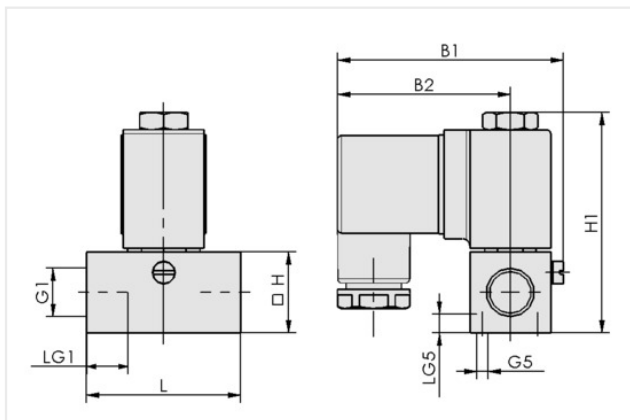

Attribute	Value
B1	61.50 mm
B2	47 mm
G1	G1/4"-F
G5	M3-F
H	22 mm
H1	60 mm
L	42 mm
LG1	12 mm
LG5	5 mm

Technical Data

Attribute	Value
Nominal size	3 mm
Control valve	Normally closed
Nominal flow rate	33.30 l/min
Nominal flow rate	2 m³/h
Power consumption DC	5 W
Voltage DC	24V – DC
Closing time	20 ms
Weight	0.20 kg

Contact Schmalz

Schmalz K.K. | 3001-7 Odana-cho, Tsuzuki-ku, 224-0027 Yokohama, Japan | +81 45 565 5150 | schmalz@schmalz.co.jp

Solenoid valve

EMV 3 24V-DC 2/2 NC

Part no.: 10.05.01.00066

<https://www.schmalz.co.jp/10.05.01.00066>



Product family	EMV
----------------	-----