

Solenoid valve

EMVO 25 24V-DC 3/2 NC

Part no.: 10.05.01.00051

<https://www.schmalz.co.jp/10.05.01.00051>

Home > Vacuum Technology for Automation > Vacuum Components > Valve Technology > Solenoid Valves > Solenoid Valves EMVO
> EMVO 25 24V-DC 3/2 NC

Solenoid valve EMVO for direct control of vacuum



Nominal size: 25 mm

Voltage DC: 24V - DC


Function: 3/2-way valve

Control valve: Normally closed

Connecting thread: G1"-F

Power consumption DC: 40.8 W

Design Data

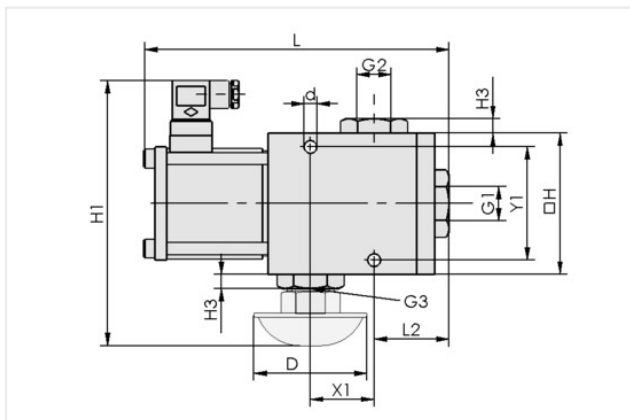

Attribute	Value
d	9 mm
D	80 mm
G1	G1"-F
G2	G1"-F
G3	G1"-F
H	100 mm
H1	172 mm
L	206 mm
L2	43 mm
X1	45 mm
Y1	80 mm

Technical Data

Attribute	Value
Nominal size	25 mm
Control valve	Normally closed
Nominal flow rate	1,683.30 l/min
Nominal flow rate	101.00 m ³ /h
Power consumption DC	40.80 W
Voltage DC	24V - DC

Contact Schmalz

Schmalz K.K. | 3001-7 Odana-cho, Tsuzuki-ku, 224-0027 Yokohama, Japan | +81 45 565 5150 | schmalz@schmalz.co.jp

Solenoid valve

EMVO 25 24V-DC 3/2 NC

Part no.: 10.05.01.00051

<https://www.schmalz.co.jp/10.05.01.00051>

Weight	5.70 kg
Product family	EMVO

Accessories



FAS 80x38 G1-AG EMVP

Part no.: 10.05.01.00063

External diameter D: 80 mm

Length L: 38 mm

Thread G1: G1"-M

Construction use: Solenoid valve

Contact Schmalz

Schmalz K.K. | 3001-7 Odana-cho, Tsuzuki-ku, 224-0027 Yokohama, Japan | +81 45 565 5150 | schmalz@schmalz.co.jp