

Solenoid valve

EMVP 10 24V-DC 3/2 NO/NC

Part no.: 10.05.02.00144

<https://www.schmalz.co.jp/10.05.02.00144>

Home > Vacuum Technology for Automation > Vacuum Components > Valve Technology > Solenoid Valves > Solenoid Valves EMVP
> EMVP 10 24V-DC 3/2 NO/NC

Solenoid valve EMVP for vacuum, pneumatic pilot control



Nominal size: 10 mm

Voltage DC: 24V - DC

Function: 3/2-way valve

Control valve: Optional NO/NC


Connecting thread: G3/8"-F

Pressure range (operating pressure): bar

Nominal flow rate: 10 m³/h

Weight: 0.42 kg

Design Data

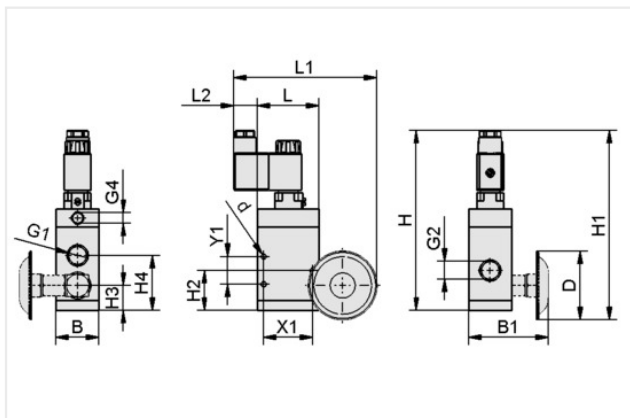

Attribute	Value
B	35 mm
B1	67 mm
d	4.30 mm
D	56 mm
G1	G3/8"-F
G2	G3/8"-F
G4	G1/8"-F
H	147 mm
H1	154.50 mm
H2	32.80 mm
H3	20.50 mm
H4	45 mm
L	50 mm
L1	117 mm
L2	19.50 mm
X1	40 mm
Y1	22.50 mm

Technical Data

Attribute

Value

Contact Schmalz

Schmalz K.K. | 3001-7 Odana-cho, Tsuzuki-ku, 224-0027 Yokohama, Japan | +81 45 565 5150 | schmalz@schmalz.co.jp

Solenoid valve

EMVP 10 24V-DC 3/2 NO/NC

Part no. : 10.05.02.00144

<https://www.schmalz.co.jp/10.05.02.00144>

Nominal size	10 mm
Nominal flow rate	10 m ³ /h
Control valve	Optional NO/NC
Nominal flow rate	167 l/min
Power consumption DC	5 W
Voltage DC	24V – DC
Closing time	22 ms
Weight	0.42 kg
Product family	EMVP

Accessories



FAS 63x47 G3/8-AG EMVP-10

Part no. : 10.05.01.00065

External diameter D: 63 mm

Length L: 47 mm

Height H: 19.5 mm

Thread G1: G3/8"-M

Construction use: Solenoid valve

Size: 10



STEC 4 S-M12-4 St

Part no. : 10.05.02.00157

Contact Schmalz

Schmalz K.K. | 3001-7 Odana-cho, Tsuzuki-ku, 224-0027 Yokohama, Japan | +81 45 565 5150 | schmalz@schmalz.co.jp