

Solenoid valve

EMVP 25 24V-DC 3/2 NO/NC

Part no.: 10.05.02.00151

<https://www.schmalz.co.jp/10.05.02.00151>

Home > Vacuum Technology for Automation > Vacuum Components > Valve Technology > Solenoid Valves > Solenoid Valves EMVP
> EMVP 25 24V-DC 3/2 NO/NC

Solenoid valve EMVP for vacuum, pneumatic pilot control



Nominal size: 25 mm

Voltage DC: 24V - DC

Function: 3/2-way valve

Control valve: Optional NO/NC


Connecting thread: G1"-F

Pressure range (operating pressure): bar

Nominal flow rate: 90 m³/h

Weight: 0.52 kg

Design Data

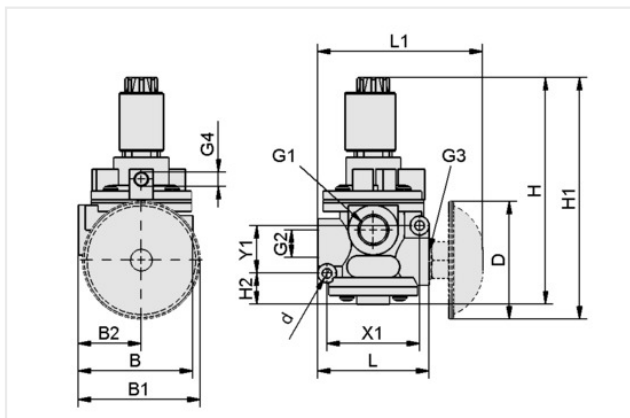

Attribute	Value
B	94 mm
B1	87 mm
B2	47 mm
d	8 mm
D	80 mm
G1	G1"-F
G2	G1"-F
G3	G1"-F
G4	G1/8"-F
H	189.50 mm
H1	195.50 mm
H2	22 mm
L	94 mm
L1	132 mm
X1	76 mm
Y1	37 mm

Technical Data

Attribute	Value
Nominal size	25 mm
Nominal flow rate	90 m³/h

Contact Schmalz

Schmalz K.K. | 3001-7 Odana-cho, Tsuzuki-ku, 224-0027 Yokohama, Japan | +81 45 565 5150 | schmalz@schmalz.co.jp

Solenoid valve

EMVP 25 24V-DC 3/2 NO/NC

Part no. : 10.05.02.00151

<https://www.schmalz.co.jp/10.05.02.00151>

Control valve	Optional NO/NC
Nominal flow rate	1500 l/min
Power consumption DC	5 W
Voltage DC	24V – DC
Closing time	80 ms
Weight	0.52 kg
Product family	EMVP

Accessories



FAS 80x38 G1-AG EMVP

Part no. : 10.05.01.00063

External diameter D: 80 mm

Length L: 38 mm

Thread G1: G1"-M

Construction use: Solenoid valve



STEC 4 S-M12-4 St

Part no. : 10.05.02.00157

Contact Schmalz

Schmalz K.K. | 3001-7 Odana-cho, Tsuzuki-ku, 224-0027 Yokohama, Japan | +81 45 565 5150 | schmalz@schmalz.co.jp