

Bellows suction cup (round)

FG 4 NBR-ESD-55 N017

Part no.: 10.01.06.04138

<https://www.schmalz.co.jp/10.01.06.04138>

Home > Vacuum Technology for Automation > Vacuum Components > Vacuum Suction Cups > Bellows Suction Cups (Round) > FG 4 NBR-ESD-55 N017

Bellows suction cup (round) for very uneven workpieces




Size: 4

Suction cup material: Nitrile rubber NBR-ESD

Material hardness [Shore A]: 55 Shore A

Number of folds: 2.5

Design Data

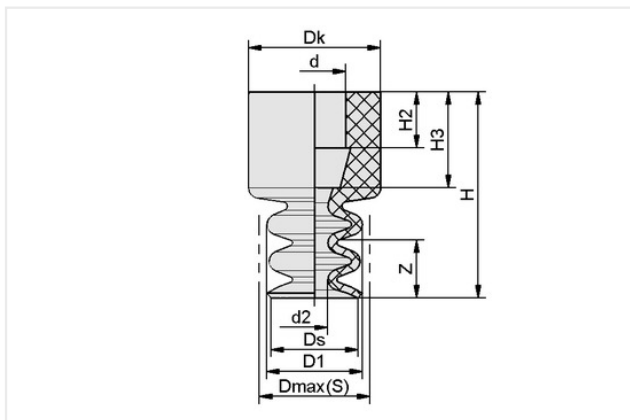

Attribute	Value
d	3.50 mm
d2	2.40 mm
D1	5.10 mm
Dk	7 mm
Dmax (S)	5.50 mm
Ds	3.80 mm
H	14 mm
H2	3.90 mm
H3	7 mm
Z (Stroke)	1.50 mm

Note: Acceptable dimensional tolerances for elastomer parts concerning to DIN ISO 3302-1 M3

Technical Data

Attribute	Value
Suction force (-600mbar)	0.27 N
Pull-off force	0.60 N
Volume	0.12 cm ³
Curve radius (min) (convex)	4 mm
Size	4
Nipple family	N 017
Number of folds	2.50

Contact Schmalz

Schmalz K.K. | 3001-7 Odana-cho, Tsuzuki-ku, 224-0027 Yokohama, Japan | +81 45 565 5150 | schmalz@schmalz.co.jp

Bellows suction cup (round)

FG 4 NBR-ESD-55 N017

Part no.: 10.01.06.04138

<https://www.schmalz.co.jp/10.01.06.04138>

Suction cup material

Nitrile rubber NBR-ESD

Material hardness [Shore A]

55 Shore A

Weight

0.40 g

Product family

FG

Accessories



SA-NIP N017 M5-AG DN200

Part no.: 10.01.06.00314

Thread G1: M5-M

Fitting length: 5 mm

Material: Aluminum



SA-NIP N017 M5-IG DN200

Part no.: 10.01.06.00313

Thread G1: M5-F

Fitting length: 10 mm

Material: Aluminum

Contact Schmalz

Schmalz K.K. | 3001-7 Odana-cho, Tsuzuki-ku, 224-0027 Yokohama, Japan | +81 45 565 5150 | schmalz@schmalz.co.jp