

Flat suction cup (round)

SUF 18 NBR-55 G1/8-IG

Part no.: 10.01.01.14118

<https://www.schmalz.co.jp/10.01.01.14118>

Home > Vacuum Technology for Automation > Vacuum Components > Vacuum Suction Cups > Flat Suction Cups (Round) > Flat Suction Cups SUF > SUF 18 NBR-55 G1/8-IG

Flat suction cup (round) for process safe handling of smooth or slightly rough surfaces




Size: 18

Suction cup material: Nitrile rubber NBR

Material hardness [Shore A]: 55 Shore A

Vacuum connection: G1/8"-F

Design Data

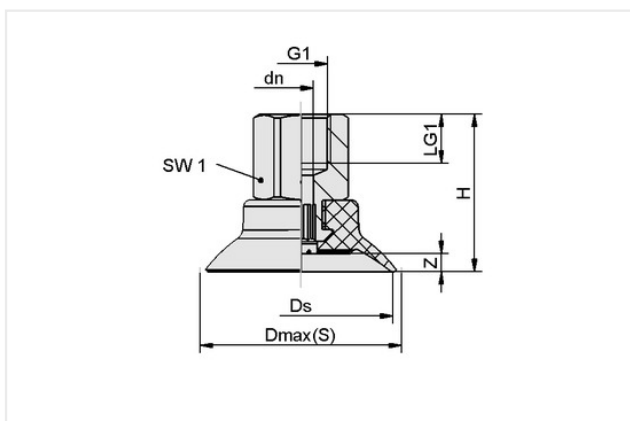

Attribute	Value
Dmax (S)	20.60 mm
Ds	18 mm
dn	3.10 mm
G1	G1/8"-F
H	23.30 mm
LG1	8 mm
SW1	14 mm
Z (Stroke)	1.80 mm

Technical Data

Attribute	Value
Suction force (-600mbar)	13 N
Pull-off force	13 N
Volume	0.37 cm ³
Curve radius (min) (convex)	20 mm
Hose diameter (rec.) d	4 mm
Size	18
Suction cup material	Nitrile rubber NBR
Material hardness [Shore A]	55 Shore A

Contact Schmalz

Schmalz K.K. | 3001-7 Odana-cho, Tsuzuki-ku, 224-0027 Yokohama, Japan | +81 45 565 5150 | schmalz@schmalz.co.jp

Flat suction cup (round)

SUF 18 NBR-55 G1/8-IG

Part no.: 10.01.01.14118

<https://www.schmalz.co.jp/10.01.01.14118>

Weight	6.10 g
Product family	SUF
Number of folds	0

Note: Suction force: The specified suction forces are theoretical values at a vacuum of -0.6 bar and with a dry, smooth and flat workpiece surface - they do not include a safety factor Hose diameter: The recommended hose diameter refers to a hose length of approx. 2 m

Spare parts



SC 030 G1/8-IG

Part no.: 10.01.06.04307

Connection geometry: 030

Vacuum connection: G1/8"-F

Fitting length: 14 mm

Nominal diameter dn: 3.1 mm



SUF 18 NBR-55 SC030

Part no.: 10.01.01.13946

Size: 18

Suction cup material: Nitrile rubber NBR

Material hardness [Shore A]: 55 Shore A