

Vacuum cup filter

VFT G1/8-IG 80

Part no.: 10.07.01.00116

<https://www.schmalz.co.jp/10.07.01.00116>

Home > Vacuum Cup Filters VFT > VFT G1/8-IG 80

Vacuum cup filter with transparent housing and replaceable filter



Connection: G1/8"-F


Shape: Short filter insert

Nominal flow rate: 45 l/min

Nominal flow rate: 2.7 m³/h

Filter pore size: 80 µm

Design Data

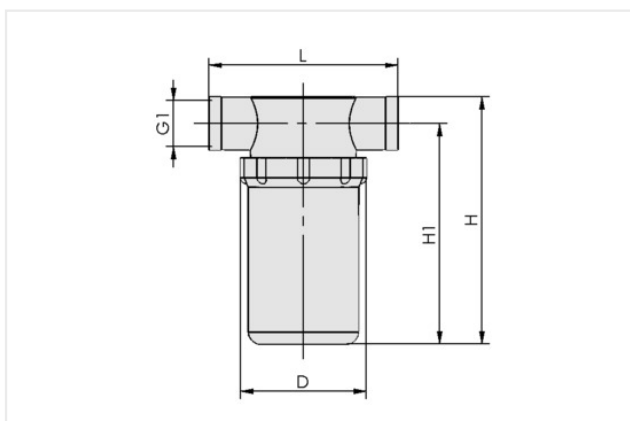

Attribute	Value
D	48 mm
G1	G1/8"-F
H	60 mm
H1	50 mm
L	76 mm

Technical Data

Attribute	Value
Connection	G1/8"-F
Nominal flow rate	45 l/min
Nominal flow rate	2.70 m³/h
Max. vacuum	-990 mbar
Overpressure (max) at 25° C	7 bar
Overpressure (max) at 50° C	5 bar
Filter pore size	80 µm
Weight	49 g
Product family	VFT

Contact Schmalz

Schmalz K.K. | 3001-7 Odana-cho, Tsuzuki-ku, 224-0027 Yokohama, Japan | +81 45 565 5150 | schmalz@schmalz.co.jp

Vacuum cup filter

VFT G1/8-IG 80

Part no.: 10.07.01.00116

<https://www.schmalz.co.jp/10.07.01.00116>

Spare parts



FILT-EINS 80 25x37 PE VFT-1/8-1/4

Part no.: 10.07.01.00141

Filter pore size: 80 µm

External diameter D: 25 mm

Length L: 37 mm

Filter material: Polyethylene

Construction use: Filters VFT

Size: 1/8-1/4



HTR-FIL 2S WI VFT1/8-1/2

Part no.: 10.07.01.00228

Shape: angled



DR 37-33x3 NBR

Part no.: 10.07.01.00154

External diameter D: 37 mm

Length L: 3 mm

Internal diameter d: 33 mm

Material: Nitrile rubber NBR

Contact Schmalz

Schmalz K.K. | 3001-7 Odana-cho, Tsuzuki-ku, 224-0027 Yokohama, Japan | +81 45 565 5150 | schmalz@schmalz.co.jp