

## Bellows suction cups (round)

FSGA 50 VU1-72 G1/4-IG ON

Part no.: 10.01.06.00300

<https://www.schmalz.co.jp/10.01.06.00300>

Home > Vacuum Technology for Automation > Vacuum Components > Vacuum Suction Cups > Suction Cups for Handling Sheet Metal > Bellows Suction Cups FSGA VU1 (1.5 Folds) > FSGA 50 VU1-72 G1/4-IG ON

### Bellows suction cup (round) with optimal adaptation to uneven surfaces



Size: 50

Suction cup material: Vulkollan VU1


Material hardness [Shore A]: 72 Shore A

Nipple material: Aluminum

Connection: G1/4"-F

Number of folds: 1.5

### Design Data

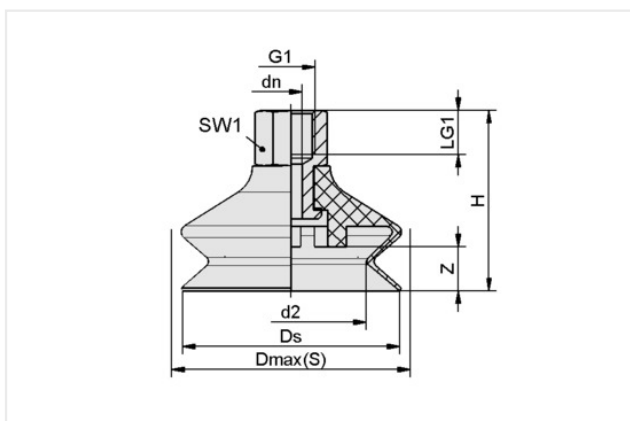

| Attribute  | Value    |
|------------|----------|
| d2         | 33.50 mm |
| dn         | 3.50 mm  |
| Dmax (S)   | 53 mm    |
| Ds         | 47 mm    |
| G1         | G1/4"-F  |
| H          | 47.50 mm |
| LG1        | 12 mm    |
| SW1        | 17 mm    |
| Z (Stroke) | 14.50 mm |

Note: Acceptable dimensional tolerances for elastomer parts concerning to DIN ISO 3302-1 M3

### Technical Data

| Attribute                   | Value                 |
|-----------------------------|-----------------------|
| Suction force (-600mbar)    | 52 N                  |
| Pull-off force              | 88 N                  |
| Volume                      | 22.60 cm <sup>3</sup> |
| Curve radius (min) (convex) | 40 mm                 |
| Hose diameter (rec.) d      | 6 mm                  |
| Size                        | 50                    |
| Nipple family               | N 011                 |

### Contact Schmalz

Schmalz K.K. | 3001-7 Odana-cho, Tsuzuki-ku, 224-0027 Yokohama, Japan | +81 45 565 5150 | [schmalz@schmalz.co.jp](mailto:schmalz@schmalz.co.jp)

## Bellows suction cups (round)

FSGA 50 VU1-72 G1/4-IG ON

Part no.: 10.01.06.00300

<https://www.schmalz.co.jp/10.01.06.00300>

|                             |               |
|-----------------------------|---------------|
| Suction cup material        | Vulkollan VU1 |
| Material hardness [Shore A] | 72 Shore A    |
| Weight                      | 25 g          |
| Product family              | FSGA          |
| Number of folds             | 1.50          |

Note: Suction force: The specified suction forces are theoretical values at a vacuum of -0.6 bar and with a dry, smooth and flat workpiece surface – they do not include a safety factor Hose diameter: The recommended hose diameter refers to a hose length of approx. 2 m

### Spare parts



SA-NIP N011 G1/4-IG DN350

Part no.: 10.01.01.00412

Nipple family: N 011

Thread G1: G1/4"-F

Length L1: 24.5 mm

Length L: 15 mm

Fitting length: 15 mm

Nominal diameter dn: 3.5 mm

Material: Aluminum

Spanner size SW2: 5 mm



FSGA 50 VU1-72 N011 ON

Part no.: 10.01.06.00302

Size: 50

Suction cup material: Vulkollan VU1

Material hardness [Shore A]: 72 Shore A

Number of folds: 1.5

## Bellows suction cups (round)

FSGA 50 VU1-72 G1/4-IG ON

Part no.: 10.01.06.00300

<https://www.schmalz.co.jp/10.01.06.00300>



FGA 50 VU1-72 N011 ON

Part no.: 10.01.06.00302

Size: 50

Suction cup material: Vulkollan VU1

Material hardness [Shore A]: 72 Shore A

Number of folds: 1.5

### Contact Schmalz

Schmalz K.K. | 3001-7 Odana-cho, Tsuzuki-ku, 224-0027 Yokohama, Japan | +81 45 565 5150 | [schmalz@schmalz.co.jp](mailto:schmalz@schmalz.co.jp)