

Solenoid valve

EMV 2 24V-DC 3/2 NC

Part no.: 10.05.01.00290

<https://www.schmalz.co.jp/10.05.01.00290>

Home > Vacuum Technology for Automation > Vacuum Components > Valve Technology > Solenoid Valves > Solenoid Valves EMV > EMV 2 24V-DC 3/2 NC

Solenoid valve EMV for direct control of vacuum and compressed air



Nominal size: 2 mm

Voltage DC: 24V – DC

Function: 3/2-way valve


Control valve: Normally closed

Connecting thread: G1/8"-F

Pressure range (operating pressure): bar

Power consumption DC: 2.2 W

Design Data

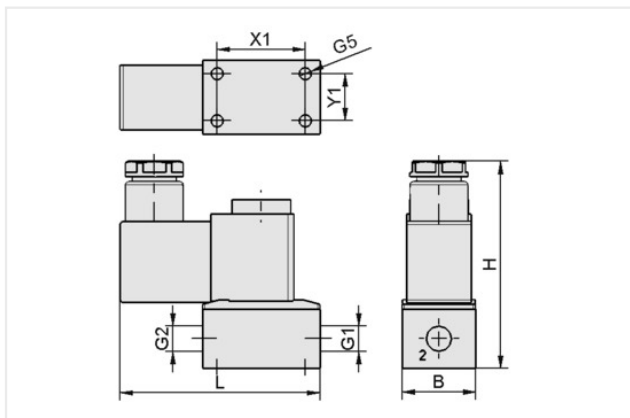

Attribute	Value
B	25 mm
G1	G1/8"-F
G2	G1/8"-F
G5	M5-F
H	70 mm
L	68 mm
X1	30 mm
Y1	16 mm

Technical Data

Attribute	Value
Nominal size	2 mm
Control valve	Normally closed
Nominal flow rate	16.70 l/min
Nominal flow rate	1 m ³ /h
Power consumption DC	2.20 W
Voltage DC	24V – DC
Closing time	10 ms
Weight	0.15 kg

Contact Schmalz

Schmalz K.K. | 3001-7 Odana-cho, Tsuzuki-ku, 224-0027 Yokohama, Japan | +81 45 565 5150 | schmalz@schmalz.co.jp

Solenoid valve

EMV 2 24V-DC 3/2 NC

Part no.: 10.05.01.00290

<https://www.schmalz.co.jp/10.05.01.00290>



Product family	EMV
----------------	-----